

Grub screws

with brass / plastic pivot

SPECIFICATION

Screw Steel

- Tensile strength class 5.8
- blackened

Thrust pivot

- Brass **MS**
- Plastic (Polyacetal POM) **KU**

INFORMATION


Grub screws GN 913.3 with pads in brass or plastic are used in applications, where marks and damage on the workpiece are unacceptable.

TECHNICAL INFORMATION

- Plastic characteristics (see page A2)
- Strength values of screws (see page A20)

* Complete with type index of the Grub screws

MS	KU
Brass	Plastic

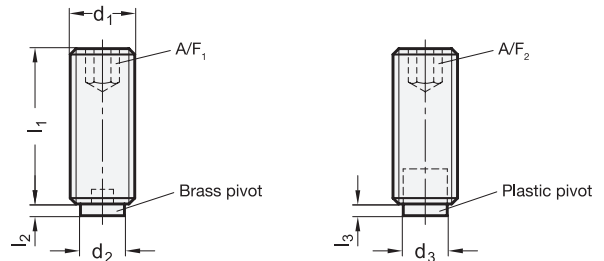

GN 913.3

Description	d1	l1	d2	d3	l2	l3 ± 0.3	A/F ₁	A/F ₂	△
GN 913.3-M3-3-*	M3	3	1.9	1.5	0.5	0.8	1.5	1.5	1
GN 913.3-M3-4-*	M3	4	1.9	1.5	0.5	0.8	1.5	1.5	1
GN 913.3-M3-5-*	M3	5	1.9	1.5	0.5	0.8	1.5	1.5	1
GN 913.3-M3-6-*	M3	6	1.9	1.5	0.5	0.8	1.5	1.5	1
GN 913.3-M3-8-*	M3	8	1.9	1.5	0.5	0.8	1.5	1.5	1
GN 913.3-M3-10-*	M3	10	1.9	1.5	0.5	0.8	1.5	1.5	1
GN 913.3-M4-4-*	M4	4**	2.5	-	0.5	-	2	-	1
GN 913.3-M4-5-*	M4	5**	2.5	-	0.5	-	2	-	1
GN 913.3-M4-6-*	M4	6	2.5	2	0.5	1	2	1.5	1
GN 913.3-M4-8-*	M4	8	2.5	2	0.5	1	2	1.5	1
GN 913.3-M4-10-*	M4	10	2.5	2	0.5	1	2	1.5	1
GN 913.3-M4-12-*	M4	12	2.5	2	0.5	1	2	1.5	1
GN 913.3-M4-16-*	M4	16	2.5	2	0.5	1	2	1.5	1
GN 913.3-M4-20-*	M4	20	2.5	2	0.5	1	2	1.5	1
GN 913.3-M5-5-*	M5	5**	3	-	0.5	-	2.5	-	1
GN 913.3-M5-6-*	M5	6**	3	-	0.5	-	2.5	-	1
GN 913.3-M5-8-*	M5	8	3	3	0.5	1	2.5	2.5	1
GN 913.3-M5-10-*	M5	10	3	3	0.5	1	2.5	2.5	1
GN 913.3-M5-12-*	M5	12	3	3	0.5	1	2.5	2.5	1
GN 913.3-M5-16-*	M5	16	3	3	0.5	1	2.5	2.5	2
GN 913.3-M5-20-*	M5	20	3	3	0.5	1	2.5	2.5	2
GN 913.3-M5-25-*	M5	25	3	3	0.5	1	2.5	2.5	3
GN 913.3-M6-6-*	M6	6	4	3.5	1	1.3	3	3	1
GN 913.3-M6-8-*	M6	8	4	3.5	1	1.3	3	3	1
GN 913.3-M6-10-*	M6	10	4	3.5	1	1.3	3	3	1
GN 913.3-M6-12-*	M6	12	4	3.5	1	1.3	3	3	2
GN 913.3-M6-16-*	M6	16	4	3.5	1	1.3	3	3	2
GN 913.3-M6-20-*	M6	20	4	3.5	1	1.3	3	3	3
GN 913.3-M6-25-*	M6	25	4	3.5	1	1.3	3	3	4
GN 913.3-M6-32-*	M6	32	4	3.5	1	1.3	3	3	5
GN 913.3-M6-40-*	M6	40	4	3.5	1	1.3	3	3	6
GN 913.3-M6-50-*	M6	50	4	3.5	1	1.3	3	3	8

GN 913.3

Description	d1	l1	d2	d3	l2	l3 ± 0.3	A/F ₁	A/F ₂	△
GN 913.3-M8-8-*	M8	8	6	5	1.5	1.6	4	4	2
GN 913.3-M8-10-*	M8	10**	6	-	1.5	-	4	-	2
GN 913.3-M8-12-*	M8	12	6	5	1.5	1.6	4	4	3
GN 913.3-M8-16-*	M8	16	6	5	1.5	1.6	4	4	5
GN 913.3-M8-20-*	M8	20	6	5	1.5	1.6	4	4	6
GN 913.3-M8-25-*	M8	25	6	5	1.5	1.6	4	4	7
GN 913.3-M8-32-*	M8	32	6	5	1.5	1.6	4	4	10
GN 913.3-M8-40-*	M8	40	6	5	1.5	1.6	4	4	12
GN 913.3-M8-50-*	M8	50	6	5	1.5	1.6	4	4	15
GN 913.3-M10-63-*	M8	63	6	5	1.5	1.6	4	4	19
GN 913.3-M10-16-*	M10	16	8	6.5	2	1.9	5	5	7
GN 913.3-M10-20-*	M10	20	8	6.5	2	1.9	5	5	9
GN 913.3-M10-25-*	M10	25	8	6.5	2	1.9	5	5	11
GN 913.3-M10-32-*	M10	32	8	6.5	2	1.9	5	5	15
GN 913.3-M10-40-*	M10	40	8	6.5	2	1.9	5	5	18
GN 913.3-M10-50-*	M10	50	8	6.5	2	1.9	5	5	23
GN 913.3-M10-63-*	M10	63	8	6.5	2	1.9	5	5	30
GN 913.3-M10-80-*	M10	80	8	6.5	2	1.9	5	5	38
GN 913.3-M12-20-*	M12	20	10	8	2	2.1	6	6	12
GN 913.3-M12-25-*	M12	25	10	8	2	2.1	6	6	16
GN 913.3-M12-32-*	M12	32	10	8	2	2.1	6	6	21
GN 913.3-M12-40-*	M12	40	10	8	2	2.1	6	6	27
GN 913.3-M12-50-*	M12	50	10	8	2	2.1	6	6	34
GN 913.3-M12-63-*	M12	63	10	8	2	2.1	6	6	43
GN 913.3-M12-80-*	M12	80	10	8	2	2.1	6	6	56
GN 913.3-M12-100-*	M12	100	10	8	2	2.1	6	6	70

** These lengths are only available with brass pivot.



Machine elements