


NORMACLAMP® HD



Foremost clamp for harsh torques and contact pressures

- ✓ The extended bridge prevents leaks and hose being damaged
- ✓ Harsh torques and contact pressures are possible
- ✓ Clamping range stamped on the band
- ✓ The minimum value of the failure torque on the HD clamp is 17 Nm

NORMACLAMP® HD

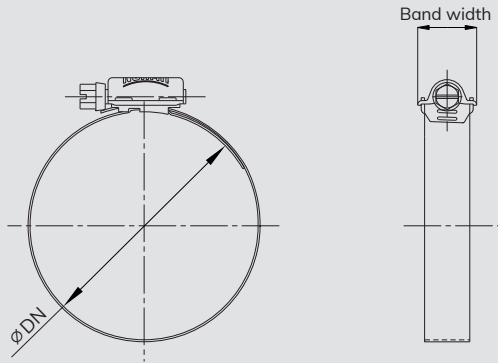

Applications

HD is well suited to applications involving poly and braided tubing that require a complete seal, e.g. for:

- Mounting of silicone, plastic and rubber tubing with steel inserts
- Applications where harsh torques and contact pressures are required

Material

| | |
|-------------------------|----------------------------|
| Group | W4 |
| Band, housing and screw | Stainless steel – AISI 304 |

| Band width (mm) | Description | Clamping range $\varnothing DN$ (mm) | Part number | Packaging quantity (pcs) |
|-----------------|---------------|--------------------------------------|---------------|--------------------------|
| 16 | HD 25-45 C8 | 25 – 45 | 0156 7804 035 | 50 |
| 16 | HD 32-54 C8 | 32 – 54 | 0156 7804 043 | 50 |
| 16 | HD 45-67 C8 | 45 – 67 | 0156 7804 056 | 50 |
| 16 | HD 57-79 C8 | 57 – 79 | 0156 7804 068 | 50 |
| 16 | HD 70-92 C8 | 70 – 92 | 0156 7804 081 | 25 |
| 16 | HD 83-105 C8 | 83 – 105 | 0156 7804 094 | 10 |
| 16 | HD 95-118 C8 | 95 – 118 | 0156 7804 106 | 10 |
| 16 | HD 108-130 C8 | 108 – 130 | 0156 7804 119 | 10 |
| 16 | HD 121-143 C8 | 121 – 143 | 0156 7804 132 | 10 |
| 16 | HD 133-156 C8 | 133 – 156 | 0156 7804 144 | 10 |
| 16 | HD 146-168 C8 | 146 – 168 | 0156 7804 157 | 10 |
| 16 | HD 159-181 C8 | 159 – 181 | 0156 7804 170 | 10 |
| 16 | HD 172-194 C8 | 172 – 194 | 0156 7804 183 | 10 |
| 16 | HD 184-206 C8 | 184 – 206 | 0156 7804 195 | 10 |
| 16 | HD 197-219 C8 | 197 – 219 | 0156 7804 208 | 10 |
| 16 | HD 210-232 C8 | 210 – 232 | 0156 7804 221 | 10 |


NORMACLAMP® HD is part of a broad portfolio. Discover more!



TORRO



GBS

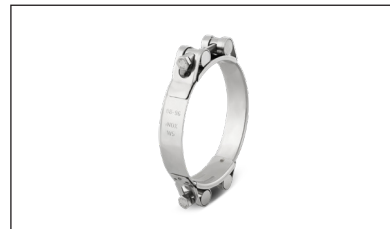

GBS multi-parts



Do you have questions or require a personal consultation?

Feel free to contact our NORMA Team! Tel.: +49 6181-403-0

Visit our website for more information about our products: www.norma-connects.com